



SECTION 13

CABLE ON THE REEL



13

SECTION CONTENTS

↓ Audio	2
↓ Microphone	3
↓ Video	4
↓ Security	5
↓ Coax	6
↓ Automotive	8
↓ Speaker, Power, Automotive	10
↓ Speaker	10
↓ Data	12
↓ Power	14
↓ Communication	14
↓ Security, Communication, Data	14
↓ Accessories	16
↓ Radio, Communication	17
↓ Heat Shrink	18
↓ Accessories, Security, Data	19



→ Audio

PREPARE YOUR OWN LEADS - AUDIO & VIDEO

GENERAL PURPOSE TO PREMIUM GRADE

Cables are supplied on Reels of lengths indicated

Cables branded "SOUNDLINK" are 99.99% OFC

Plugs Section 07 PLUGS & SOCKETS

Crimp Section 07 PLUGS & SOCKETS

Tools Section 14 TOOLS & TEST EQUIPMENT

Automotive Section 18 CAR AUDIO ACCESSORIES

Pre-Made Section 08 PREPARED LEADS

Gold RCA Plugs To Suit



SECTION 7 PLUGS...



Prepare Your Own Custom Cables

CUSTOM



PLUGS
Section 7



Pre-Made
Cables, See
Section 8



SINGLE CORE AUDIO SHIELDED CABLE 2mm

7 strands of 0.12mm centre with copper shielding.

Compact outside diameter = 2mmØ Black Jacket.

Suitable for general purpose audio & control leads

and for internal jumpers and short connections, etc.

Length Code
100M SHW1207



STEREO SHIELDED SINGLE JACKET CABLE 3mm

Two internal wires with a common shield. Suit audio applications.

As used in wiring up headphones, 3.5mm extension cables, etc.

3mm Black Jacket. 7x0.12mm(x2) + 40x0.12mm(Shield)

Length Code
100M SAC312



TWISTED PAIR SHIELDED SINGLE JACKET CABLE

DATA CABLE FOR A/V

As used for some signal transfer systems and A/V modulators, etc.

Also suitable for balanced audio transmission or short unbalanced.

Dark Grey PVC 4mmØ jacket. 7x0.20mm(0.22mm²) Al Mylar + Drain wire.

Length Code
100M SHW3035
300M SHW3036



TWIN PAIR SHIELDED SINGLE JACKET CABLE

QUAD WIRE DATA CABLE FOR A/V

As used for some signal transfer systems and A/V modulators, etc.

Also suitable for audio applications like DIN plug wiring, etc.

Dark Grey PVC 4mmØ jacket. 7x0.20mm(0.22mm²). Al Mylar + Drain wire.

Length Code
100M SHW3032
300M SHW3033



COMMON MYLAR [Al] SHIELD - PAIRS INDIVIDUALLY WRAPPED

SOUNDLINK SHIELDED AUDIO CABLE 7mm

Low loss coaxial interconnect audio by SOUNDLINK 100% double shielded.

99.99% OFC copper braid and Aluminium Foil. 55 Strand OFC centre core.

FOAM-PE Double insulated for super low capacitance.

Heavy duty PVC Jacket. A deep red crimson in colour. OD=7mmØ ID=5mm.

Audiophile characteristic premium transfer interconnect.

Length Code
50M AIC227



PVC JACKET 7mmØ
95% COPPER SCREEN OFC
100% ALUMINIUM SCREEN
FOAM-PE INSULATOR



PVC INSULATOR
MULTI-STRAND OFC CORE

SOUNDLINK SHIELDED AUDIO CABLE 8mm

Ultra low loss interconnect audio by SOUNDLINK. 100% Triple shielded

99.99% OFC copper braid, Alumina Mylar and Conductive PVC.

80 Strand OFC copper centre core. FOAM-PE Insulated.

Heavy duty PVC Jacket Electric Blue. OD=8mmØ ID=5mm.

Exotic materials for superior audio connections.

Length Code
50M AIC228

PVC JACKET 8mmØ
95% COPPER SCREEN OFC
100% ALUMINIUM SCREEN
CONDUCTIVE PVC SCREEN



MULTI-STRAND OFC CORE
P.E. DIELECTRIC INSULATOR



→ Audio

SHIELDED STEREO AUDIO CABLE 2x3mm

Grey outer, red and white individually shielded inner cables.
10 strands of 0.12mm each with copper shielding. OD = 3mmØ
Mostly used for internal jumpers and short connections, etc.
Popular stereo interconnect for general purpose applications.


Length Code
100M SHW1210



PREMIUM SHIELDED STEREO AUDIO CABLE 2x4mm

Dual shielded and suitable for low loss in HiFi audio connections.
10 strand (10x0.1mm) heavy gauge (24AWG) wire with optimum braided shielding and protected by a tough but flexible black outer coating (2x4mm). We highly recommend this as a superior quality stereo audio cable. Supplied on 100M reel.

Length Code
100M SQS100

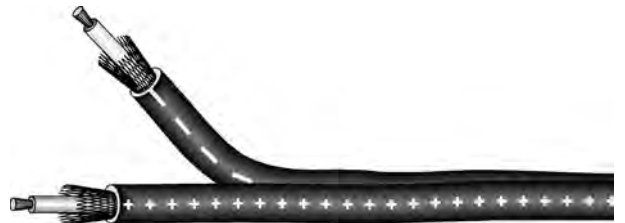

SOUNDLINK SHIELDED STEREO AUDIO CABLE 2x6mm

Low loss stereo interconnect audio cable 100% shielded by OFC braid & Alumina-Mylar with FOAM-PE insulation.
Heavy duty PVC Jacket. Suitable for Car or Home HiFi applications. See section 7 PLUGS & SOCKETS for plugs.
Colour Deep Navy Blue OD=6mmØ ID=3mm.

Length Code
50M AIC236

PVC JACKET 6mmØ
95% COPPER SCREEN OFC
100% ALUMINIUM SCREEN
FOAM P.E. INSULATOR
MULTI-STRAND OFC CORE



PLUGS Section 7



Pre-Made Cables, See Section 8



Prepare Your Own Custom Cables

→ Audio, Microphone

QUALITY SHIELDED MICROPHONE AND AUDIO CABLE 4.5mm

Single core, tough but flexible cable for audio & microphone applications.
Good cable suitable for short runs, or longer with slight losses.
16 strands of 0.14mm with full braided copper shielding.
SOUNDLINK. Black PVC jacket OD=4.5mmØ

Length Code
100M SAC451



PREMIUM SHIELDED MICROPHONE AND AUDIO CABLE 6mm

Single core, highly flexible cable with heavy duty protective matte jacket.
56 strands of 0.07mm with full copper shielding. Primarily for mic leads.
Suit our high-grade 6.35mm Gold Plated Phono and the "Cannon" type plugs.
Supplied on 100M reels. Black in colour. OD=6.0mmØ

Length Code
100M SAC601



PROFESSIONAL SHIELDED BALANCED MICROPHONE CABLE 7mm

Premium quality microphone cable with dual conductors, 14 X 0.19mm strands.
Wrapped in the one copper shielding with cotton rope for added strength.
Primarily for balanced microphone applications. Suit Cannon type plugs.
Supplied on 100M reels. OD=7mmØ

Length Code
100M SHW1914






→ Video

SOUNDLINK VIDEO CABLE 7mm

75Ω low loss coaxial video interconnect by SOUNDLINK USA. 7 Strand OFC centre core. 100% Shielded by OFC & Alumina Mylar. PVC/FOAM-PE double insulated. Heavy duty PVC Jacket. Wide Band. Colour:Navy Blue. OD=7mmØ ID=5mm.


Length	Code
50M	VIC206

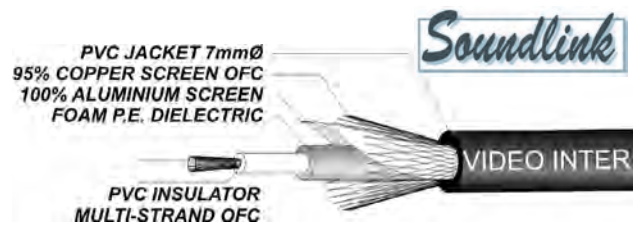

SOUNDLINK HEAVY DUTY VIDEO CABLE 8mm

75Ω low loss coaxial video interconnect by SOUNDLINK USA. 7 Strand OFC centre core. 100% Shielded by OFC & Alumina Mylar. PVC/FOAM-PE double insulated. EXTRA HEAVY DUTY PVC Jacket. Colour:Navy Blue. OD=8mmØ ID=5mm.


Length	Code
50M	VIC207

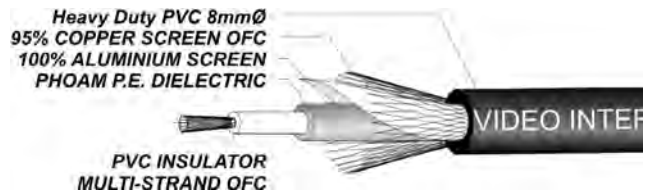

S-VHS VIDEO INTERCONNECT CABLE 5.5mm

75Ω low loss OFC Dual interconnect by SOUNDLINK USA. This cable is designed for S-VHS applications & is suitable for long cable runs with minimal signal degradation. 10 Strand OFC centre, each is 100% shielded by OFC braid then insulated for improved visual reproduction, the pair is then protected by FOAM-PE & a tough Black PVC jacket. OD=5.5mmØ ID=2mm.


Length	Code
50M	VIC240



OFC AUDIO & VIDEO CABLE 6mm

75Ω Low loss 6mm OFC video interconnect with OFC and Aluminium screen. 3.5mm Low loss OFC Shielded Audio pair for Left and Right Audio. Tough PVC Jacket, Light blue in colour. Attractive finish. Runs stereo audio and Composite Video in a triple lead.

Length	Code
50M	VIC250
100M	VIC1250

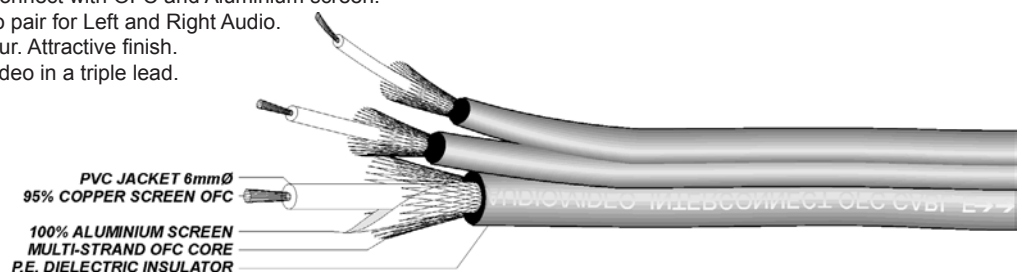

RGB/COMPONENT VIDEO CABLE (3X 75Ω COAX) 7mm ELECTRIC-BLUE

Triple High Grade OFC 75Ω Interconnect by SoundLink. Multi-strand core. Suit HD-TV, DVD, Colour-Difference, Colour-Stream, Computers, etc. Attractive Blue PVC jacket. Red/Green/Blue cores. Double shielded. Same specifications as our Popular Video Soundlink 7mm cable above.

Length	Code
50M	VIC252
100M	VIC1252



TRIPLE 75Ω RG59U COAX 6mm SINGLE-CORE FOAM X3

DVD-HDTV. Black PVC 6mm outer diameter Jacket. Dual shield Tinned Copper Braid Plus Aluminium foil. Colour coded [Red Green Blue] Foam PE Dielectric insulators. Single solid core tinned copper. Suit Crimp, compression, etc.

Length	Code
100M	RG59TRIO






→ Video

AGGREGATE VIDEO CABLE - RGB/YUV (3X)

HEAVY DUTY SINGLE SHEATH ORANGE - TRIPLE

Large 13mm Orange Jacket Professional grade. Nylon rope strengthened. Long life design. 3x Double shielded 75Ω for Video/Audio, etc.

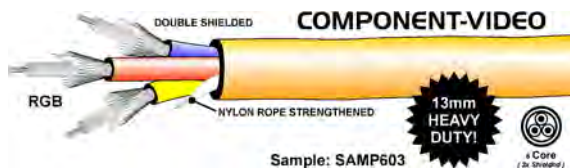

Sample: SAMP603

13mm HEAVY DUTY!



Length	Code
50M	VIC303

AGGREGATE VIDEO CABLE - SVHS & STEREO (4X)

HEAVY DUTY SINGLE SHEATH ORANGE

Large 12mm Orange Jacket with nylon rope reinforced. Long life design. 1x Dual Coax 75Ω Video (SVHS) with separate internal jacket shielded. Plus 2x Double shielded coax for Audio. Suit professional installations.



Sample: SAMP604

Tough ORANGE Outer!




Length	Code
50M	VIC304

AGGREGATE VIDEO CABLE - COMPUTER MONITOR VGA or SCART (RGB-HV)

Typical replacement style VGA cable. All double shielded. Black 8mm Jacket. 3x Shielded wires RGB (75W Coax) 4x Control wires (Common shield)

Color	Microphone	Signal	Microphone	Color
Blue	Blue	Microphone	Blue	Blue
Green	Green	Microphone	Green	Green
Red	Red	Microphone	Red	Red
Black	Black	Microphone	Black	Black
White	White	Microphone	White	White
Yellow	Yellow	Microphone	Yellow	Yellow
Purple	Purple	Microphone	Purple	Purple
Brown	Brown	Microphone	Brown	Brown
Pink	Pink	Microphone	Pink	Pink
Grey	Grey	Microphone	Grey	Grey
Light Blue	Light Blue	Microphone	Light Blue	Light Blue
Light Green	Light Green	Microphone	Light Green	Light Green
Light Red	Light Red	Microphone	Light Red	Light Red
Light Black	Light Black	Microphone	Light Black	Light Black
Light White	Light White	Microphone	Light White	Light White
Light Yellow	Light Yellow	Microphone	Light Yellow	Light Yellow
Light Purple	Light Purple	Microphone	Light Purple	Light Purple
Light Brown	Light Brown	Microphone	Light Brown	Light Brown
Light Pink	Light Pink	Microphone	Light Pink	Light Pink
Light Grey	Light Grey	Microphone	Light Grey	Light Grey
Light Light Blue	Light Light Blue	Microphone	Light Light Blue	Light Light Blue
Light Light Green	Light Light Green	Microphone	Light Light Green	Light Light Green
Light Light Red	Light Light Red	Microphone	Light Light Red	Light Light Red
Light Light Black	Light Light Black	Microphone	Light Light Black	Light Light Black
Light Light White	Light Light White	Microphone	Light Light White	Light Light White
Light Light Yellow	Light Light Yellow	Microphone	Light Light Yellow	Light Light Yellow
Light Light Purple	Light Light Purple	Microphone	Light Light Purple	Light Light Purple
Light Light Brown	Light Light Brown	Microphone	Light Light Brown	Light Light Brown
Light Light Pink	Light Light Pink	Microphone	Light Light Pink	Light Light Pink
Light Light Grey	Light Light Grey	Microphone	Light Light Grey	Light Light Grey

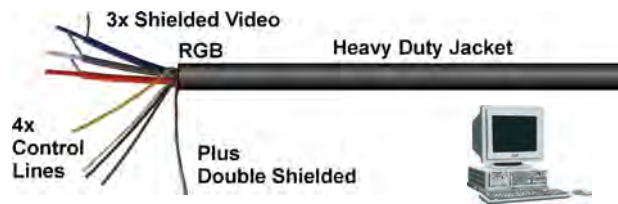

Length	Code
50M	SQS407
100M	SQS1407

→ Security

AGGREGATE SECURITY CABLE - VIDEO & 5X MULTICORE SHIELDED

Cream coloured 5.5mm Diameter Coaxial cable suitable for video or audio. Five colour coded wires suitable for low voltage. All encased in single shielding foil and using the coax ground as the shield/earth connection.

Length	Code
100M	SEC7505
305M	SEC17505

LOW VOLTAGE CONTROL WIRES COLOUR CODED ALL SHIELDED



75ohm VIDEO COAX

IDEAL SECURITY CAMERA CCTV INTERCONNECT

AGGREGATE SECURITY CABLE - VIDEO & 2X LOW VOLTAGE WIRES

2 CORE + 75Ω COAX RG59 BLACK 6mm

Single Heavy duty double jacket weather resistant camera installation cable. 2x 7.5A for low voltage power bundled with 75Ω RG59B/U double shielded coax


Length	Code
100M	SEC101
305M	SEC103



SECURITY CABLE

TWISTED PAIR 5mm O/D Fire Retardant PVC

Core	Colour	Length	Code
4	Brown	100M	SEC414BR-100
4	Brown	305M	SEC414BR-305
4	Grey	100M	SEC414GY-100
4	Grey	305M	SEC414GY-305
4	White	100M	SEC414WH-100
4	White	305M	SEC414WH-305
4+ Shield	Grey	100M	SHW3032
4+ Shield	Grey	300M	SHW3033

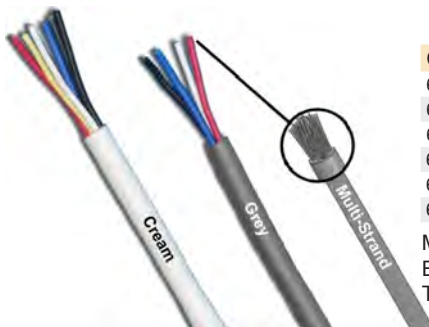


Core	Colour	Length	Code
6	Brown	100M	SEC614BR-100
6	Brown	305M	SEC614BR-305
6	Grey	100M	SEC614GY-100
6	Grey	305M	SEC614GY-305
6	Cream	100M	SEC614WH-100
6	Cream	305M	SEC614WH-305

More "Twisted-Pair" is available as Computer Ethernet cable CAT5/6e and other styles like Telephone, etc. See following pages...

TWISTED PAIR DROP CABLE

High grade, high current, low loss, low capacitance. Suitable for many applications including-Speaker wire, both 8 ohms and 100v line, Video intercoms, Low voltage applications (AC or DC) eg, security, garden lights etc. Twisted pair in black PVC Jacket, ideal for running through walls and areas which are damp and prone to water penetration or applications where a better quality cable is required. 8mm Outer sheath 1mm thick. 3mm with 48 strands x 0.2mm x 2 core, 300Vac max.

Length	Code
100M	CAB4822

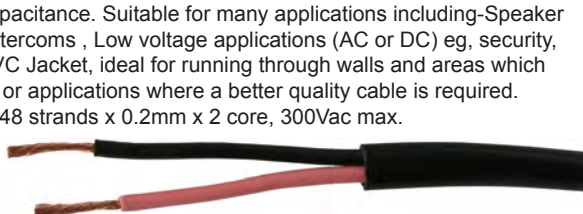



13 CABLE & ACCESSORIES

→ Coax

RG316U COAX

Communications Cable. Very small diameter 2.5mmØ. PTFE Dielectrics. FEP Clear Jacket. Full Braided Shield Silver Plated Copper Multi Strand centre.

50 ohm mini

Length Code

50M RG316U-50

Available Cut To Length

Code

RG316U-1



50Ω RG174/U COAX 2.5mm

Multi-strand steel/copper (0.48mm) with braid tinned copper 90% shield. PE Dielectric (1.5mm). PVC Jacket Black (2.55mm). 100pF/M. 50 Metres.

Length Code

50M RG174U-50

Available Cut To Length

Code

RG174U-1



50Ω RG58U COAX 5mm

Multi-strand with braided copper shield.

Equiv. Length Code

RG58U 100M RG58AU

Available Cut To Length

Code

RG58AU-1



50Ω RG58CU COAX 5mm

Mobile communications and computer ethernet installations. Tinned Multi-Strand High-shielding

Length Code

100M RG58CU

Available Cut To Length

Code

RG58CU-1



50Ω LL195 COAX 5mm

LOW-LOSS BROADBAND COMMUNICATIONS CABLE - SOLID CORE
Double shielded with over 93% coverage copper braid + aluminium tape 100% Extra wide bandwidth. Gas-Injected Foam Polyethylene 2.79mm insulator. Solid core copper 0.94mm centre. Suits a majority of crimp plugs, etc. Black polyethylene outdoor flooded weather-proof UV resistant jacket.

Length Code

100M LL195

1M LL195-1

50Ω RG213U COAX 10mm

HEAVY DUTY flooded cable with UV-Resistance, etc. Tinned Multi-Strand. High-shielding.

Length Code

100M RG213U

Available Cut To Length

Code

RG213U-1



50Ω LL400 COAX 10mm

LOW-LOSS BROADBAND COMMUNICATIONS CABLE

Solid Copper Centre 2.75mm. Double shielded with over 93% coverage copper braid + aluminium tape 100%. Extra wide bandwidth Gas-Injected Foam Polyethylene 7.25mm insulator. Black polyethylene outdoor flooded weather-proof UV resistant jacket.

Length Type Code

50M Reel LL400

100M Reel LL402

305M Reel LL403

1M* Cut To Length LL400-1





→ Coax

75Ω RG59AU COAX 6mm MULTI-STRAND

6mm outer diameter. Single Copper Shielding. Clear plastic dielectric. Multi-strand. Reel.

Length Code
100M RG59AU

Available Cut To Length

Code
RG59AU-1



75Ω RG59U COAX 6mm SINGLE-CORE FOAM

6mm outer diameter. Dual Tinned Copper & Aluminium foil shielding. Foam PE dielectric. Single core.

Length Code
100M RG59U

Available Cut To Length

Code
RG59U-1



75Ω RG6 COAX 6.8mm SINGLE-CORE PE DUAL-SHIELD

Grade "A" UV resistant PVC outer protected. Aluminium (Al) and braided (96 x 0.12mm) shielding. 4.57mm diameter polyethylene dielectric. 1.02mm Copper clad steel solid centre core.

Length Code
100M RG6PE

Available Cut To Length

Code
RG6PE-1



TRIPLE 75Ω RG59U COAX 6mm SINGLE-CORE FOAM X3

DVD-HDTV. Black PVC 6mm outer diameter Jacket. Dual shield Tinned Copper Braid Plus Aluminium foil. Colour coded [Red Green Blue] Foam PE Dielectric insulators. Single solid core tinned copper. Suit Crimp, compression, etc.

Length Code
100M RG59TRIO



75Ω RG6 COAX 7.5mm SINGLE-CORE PE QUAD SHIELD

Grade "A" cable w/ UV resistant PVC outer jacket protected. Multi Aluminium braiding (96 x 0.12mm) & foil shielding. 4.57mm diameter polyethylene (Foam-PE) dielectric 1.02mm Copper clad steel solid centre core.

REEL

Length Code
100M RG6Q100
305M RG6Q305-RL

PULL-BOX

305M RG6Q305-BX

Available Cut To Length

RG6Q100-1



75Ω RG11 COAX 10.2mm FOAM-PE QUAD-SHIELD

Grade "A" UV resistant PVC outer protected extra heavy-duty cable. Aluminium (Al) x2 braided (16 x 0.16mm x2) shielding. 7.11mm diameter polyethylene dielectric. 1.63mm Copper clad steel solid centre core.

Length Code
305M RG11Q305




300Ω RIBBON

CLEAR - BALANCED

Supplied on 200 metre rolls Baluns, etc.

Length Code
200M RW300C

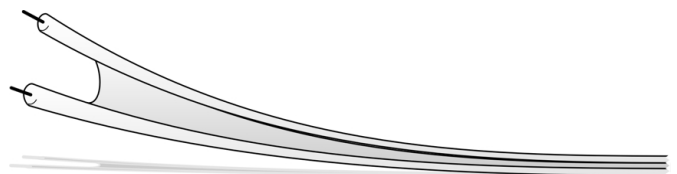

See Section 9 ANTENNA ACCESSORIES



13 CABLE & ACCESSORIES

→ Automotive

EXTREME-POWER OFC INTERCONNECT

Pure Oxygen-Free Copper Power Interconnect. Incredible current limits beyond measurement. Automotive grade red tinted outer jacket. For shorter lengths see our installation kits. Available in RED on 30 Metre reels.

2AWG 6.5mmØ + Jacket

Colour	AWG	Code
Red	2AWG	BSX230R



HIGH-POWER OFC INTERCONNECT

High Grade Flexible 99.95% OFC SoundLink in Red or Black. 30 Metre reels.

4AWG 180A 5.2mmØ Jacket 10mmØ

Heavy Duty Jacket

Colour	AWG	Code
Red	4AWG	APC1040
Black clear	4AWG	BSX430B

8AWG 92A 3.3mmØ Jacket 7mmØ

Transparent Jacket

Colour	AWG	Code
Red	8AWG	APC1280
Black	8AWG	APC1281



LOW-POWER INTERCONNECT

Single small gauge cable with 3mm O/D colour coded jacket for low power accessories, trigger, etc. Supplied 100M Reels.

15 AWG ACCESSORIES CABLE 100M

Colour	AWG	Code
Black	15	AP915BK
Red	15	AP915R
Blue	15	AP915BU
Green	15	AP915GN

16 AWG TRIGGER CABLE 100M

Colour	AWG	Code
Orange	16	MX16100




22 AWG CLOTH COVERED WIRE

VINTAGE SOLID CORE SINGLE CORD REEL 15 METRES

Authentic wire for restoration work and high temperature applications. Double woven cloth jacket, wax coated, with Celanese inner braiding. Real Deal. From the same manufacturer that supplies Fender, etc.

HIGH-TEMPERATURE CLOTH WAXED

Colour	Length	Code
Black	15M	PBW50BK
Blue	15M	PBW50BU
Brown	15M	PBW50BN
Red	15M	PBW50RD
White	15M	PBW50WH
Yellow	15M	PBW50YL

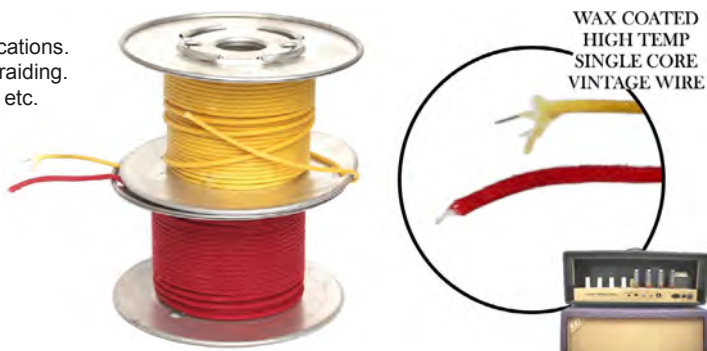

WAX COATED
HIGH TEMP
SINGLE CORE
VINTAGE WIRE

AUTOMOTIVE TWIN POWER CABLE

Red & Black pair for speakers or DC power Extra thick PVC jacket for protection in high wear and hostile environments. Multi-stranded copper litz wire pair. Figure 8 cable. Supplied on 100M reels.

12AWG 15A HEAVY DUTY JACKET

61x0.18mm Strands. 2x4.5mm Jacket.

AWG	Length	Code
12AWG x2	100M	AW1861

18AWG 10A HEAVY DUTY JACKET

37x0.12mm Strands. 2x3.5mm Jacket.

AWG	Length	Code
18AWG x2	100M	AW1237



**Soundlink
POWER-LINK**

EXTRA TOUGH JACKET 100M



→ Automotive, Power

0 AWG 2000W POWER CABLE KIT

MEGA POWER AMP KIT 150A

No fuss installation solution. Saves time! Ideal for the newer, hungrier digital amps.
 5.5M 0 AWG Braided Power Cable with O-Ring Terminal preinstalled
 0.8M 0 AWG Braided Ground Cable with O-Ring Terminal preinstalled
 ANL Fuse assembly with 250A Fuse
 0 AWG Grommet
 5.0M 20 AWG Trigger Wire with Fork Terminal preinstalled
 6pcs Cable Ties
 1.8M Split Loom Tubing included

Code
MX000



2 AWG 1500W POWER CABLE KIT

5.5M 2 Gauge Red Power Cable with terminal.
 0.8M 2 Gauge Silver Ground Cable.
 5M 20 Gauge Blue Trigger cable.
 1.8M Split Loom Tubing Black
 For fire retardant protection
 In-line ANL Fuse Holder
 and 2x distribution blocks (+/-)
 With 4x 4AWG Cable connections
 Includes 150 Amp ANL Fuse.
 Excellent installer solution
 Packaged for resale

Code
MX002



6 AWG 600W 4-CH AMP KIT

POWER & AUDIO QUAD

6M 6GA Red Power Cable
 1.2M 6GA Clear Black Ground Cable
 5.5M 18GA Blue Trigger Wire
 1 Silver plated AGU Fuse Holder & 50A Fuse.
 5M Clear Blue Double Shield RCA Cable
 [4x Male to 4x Right-Angled Male.]
 10M 14GA Clear Speaker Cable
 Supplied with all terminals and
 Installation equipment.

Code
PS91



4 AWG 1000W POWER CABLE KIT

6.0M 4 Gauge Red Power Cable To O-Ring
 0.8M 4 Gauge Black Ground Cable To O-Ring
 5M 20 Gauge Blue Trigger cable.
 1.8M Split Loom Tubing Black
 For fire retardant protection
 In-line ANL Fuse Holder
 and Includes 120 Amp ANL Fuse.
 6pcs of cable ties
 Excellent installer solution
 Packaged for resale

Code
MX004



8 AWG 600W 4-CH AMP KIT

POWER & AUDIO QUAD

6M 8GA Red Power Cable.
 1.2M 8GA Black Ground Cable.
 6M 16GA Blue Trigger Cable.
 2x 6M Twisted Pair RCA Leads with
 Right-Angled Plugs on one end.
 6M 12GA Speaker Cable.
 In-line AGU Fuse Holder 60 Amp Fuse.
 Supplied with all terminals and
 installation equipment.

Code
BSX408



8 AWG 300W POWER CABLE KIT

6M 8 Gauge Red Power
 Cable. ½M Black Ground
 Cable. 6M 18GA Blue Trigger
 Cable. In-line AGU Fuse
 Holder. 40 Amp AGU Fuse.

Code
AP953



8 AWG 400W 2-CH AMP KIT

POWER & AUDIO STEREO

6M 8GA Red Power Cable.
 1.2M 8GA Black Ground Cable.
 6M 18GA Blue Trigger Cable.
 AGU Fuse Holder with 60 Amp Fuse.
 1x 6M High-Grade RCA Lead.
 2x Male to 2x Right-Angled Male.
 6M 16GA Speaker Cable.
 Supplied with all terminals &
 installation equipment

Code
BSX208



8 AWG 200W POWER CABLE KIT

200Wrms 600Wpeak WITH 60A AGU FUSE

6m 8 AWG braided power cable with
 O-ring terminal preinstalled
 0.8m 8 AWG braided ground cable
 with O-ring terminal preinstalled
 AGU fuse assembly with 60A fuse
 5m 20 AWG trigger wire with fork
 terminal preinstalled
 6pcs cable ties and 8 AWG grommet
 1.8m split loom tubing

Code
MX008



8 AWG 300W 2-CH AMP KIT

POWER & AUDIO STEREO

6M 8AWG Clear Red Power Cable
 1M 8AWG Clear Black Ground Cable
 5M 18GA Blue Trigger Wire
 5M Clear Blue Double Shielded RCA Cable
 [2x Plugs to 2x Right-Angled Plugs.]
 Supplied with all terminals
 and installation equipment

Code
PS90





13 CABLE & ACCESSORIES

13 CABLE & ACCESSORIES

→ Speaker, Power, Automotive

22AWG GENERAL PURPOSE - TWIN HOOK UP 1.5mm

Grey with black tracer for low voltage. 1.6mm x 2 core with 11 x 0.16mm strands

Length Code
100M SPW1611



22AWG GENERAL PURPOSE - TWIN HOOK UP 2.5mm

Grey with red tracer for low voltage. 2.5mm x 2 core with 24 x 0.12mm strands

Length Code
100M SPW1224



→ Speaker

18AWG SPEAKER CABLE - LIGHT DUTY JACKET

Clear PVC with Pure Copper strands.
Tracer for easy polarity ID.
Ideal for speaker box wiring, etc.
2.2mm x 2 core with 24 x 0.20mm strands


Length Code
100M SPW2024



20AWG SPEAKER CABLE - HEAVY DUTY CLEAR JACKET

Classic Speaker Interconnect.
Clear with Silver(+) & Copper(-) strands.
2.5mm x 2 core 18 x 0.16mm strands

Length Code
100M SPW1618

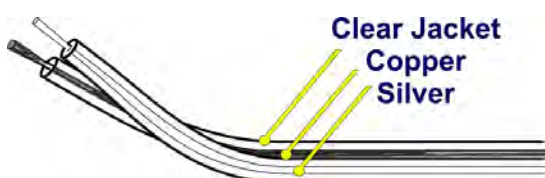

18AWG SPEAKER CABLE - HEAVY DUTY CLEAR JACKET

Classic Speaker Interconnect.
Clear with Silver(+) & Copper(-) strands.
3mm x 2 core 41 x 0.16mm strands

Length Code
100M SPW1641



AWG/METRIC TABLE

AWG	Ømm	mm ²
0	8.25	53.4
1	7.35	42.4
2	6.54	33.6
3	5.83	26.7
4	5.19	21.2
5	4.62	16.8
6	4.11	13.3
7	3.67	10.6
8	3.26	8.35
9	2.91	6.62
10	2.59	5.27
11	2.30	4.15
12	2.05	3.31
13	1.83	2.63
14	1.63	2.08
15	1.45	1.65
16	1.29	1.31
17	1.15	1.04
18	1.02	0.82
19	0.91	0.65
20	0.81	0.52
21	0.72	0.41
22	0.64	0.33
23	0.57	0.26
24	0.51	0.21
25	0.46	0.16
26	0.41	0.13
27	0.36	0.10
28	0.32	0.08
29	0.29	0.06
30	0.26	0.05
31	0.23	0.04
32	0.20	0.03
33	0.18	.025
34	0.16	.020
35	0.14	.016
36	0.13	.012
37	0.11	.010
38	0.10	.008
39	0.09	.006

→ Automotive, Power

18AWG CABLE HEAVY DUTY JACKET 10A

Red/Black heavy duty for high current. (10A)
3.5mm x 2 with 37 x 0.12mm strands

Length Code
100M AW1237



12AWG CABLE HEAVY DUTY JACKET 15A

Red/Black heavy duty for higher current. (15A)
4.5mm x 2 with 61 x 0.18mm strands.

Length Code
100M AW1861



→ Power

14AWG QUAD-CORE SPEAKER CABLE

INSTALLER 100V-LINE PA & MORE!

High-grade high-current speaker cable Low-loss, low-capacitance, heavy gauge Quad core for Stereo or Dual-Amp runs. Suit 100V Line PA Compatible. Heavy duty protective 9mm PVC Jacket 4x 14AWG(2.5mm) 42x0.2mm strands. Mauve Jacket. 100 metres. Neutrik NLT4MX Compatible

Length Code
100M CAB4220



TWISTED PAIR DROP CABLE

High grade, high current, low loss, low capacitance. Suitable for many applications including-Speaker wire, both 8 ohms and 100v line, Video intercoms, Low voltage applications (AC or DC) eg, security, garden lights etc. Twisted pair in black PVC Jacket, ideal for running through walls and areas which are damp and prone to water penetration or applications where a better quality cable is required. 8mm Outer sheath 1mm thick. 3mm with 48 strands x 0.2mm x 2 core, 300Vac max.

Length Code
100M CAB4822





→ Speaker

18AWG SOUNDLINK OFC SPEAKER CABLE

This High Grade speaker interconnect cable is designed for low loss signal transfer for optimum home and car audio applications. 99.95% OFC. Figure 8 Clear PVC jacket. Low power type, eg. Surround sound, etc. 18AWG OD=3.5x7mm. Strands:105x0.1mm x2

Length	Code
50M	AIC335
100M	AIC1335



15AWG SOUNDLINK OFC SPEAKER CABLE

This High Grade speaker interconnect cable is designed for low loss signal transfer for optimum home and car audio applications. 99.95% OFC. Figure 8 Clear PVC jacket. Suit most under 100WRMS systems. 15AWG OD=3.5x7mm. Strands:189x0.1mm x2

Length	Code
50M	AIC727
100M	AIC1727



13AWG SOUNDLINK OFC SPEAKER CABLE

High Grade speaker interconnect cable, designed for low loss signal transfer, for optimum home and car audio applications. 99.95% OFC. Figure 8 Clear PVC jacket. Low loss for longer signal runs. 13AWG OD=4x8mm Strands:315x0.10mm x2

Length	Code
50M	AIC745
100M	AIC1745



11AWG SOUNDLINK OFC SPEAKER CABLE

High Grade speaker interconnect cable, designed for low loss signal transfer for optimum home and car audio applications. 99.95% OFC. Figure 8 Clear PVC jacket. For High System Power, low loss. 11AWG OD=4.5x9mm Strands:504x0.1mm x2

Length	Code
50M	AIC772
100M	AIC1772



9AWG SOUNDLINK OFC SPEAKER CABLE HIGH POWER !

High Grade speaker interconnect cable, designed for low loss signal transfer for optimum home and car audio applications. 99.95% OFC. Figure 8 Clear PVC jacket. For very High System Power, low loss. 9AWG OD=6x12mm Strands:763x0.1mm x2


Length	Code
50M	AIC7109



16AWG SOUNDLINK-QUAD OFC SPEAKER CABLE FOUR PLY

High grade OFC in a unique quad form. Suit Bi-wire, Bi-amp or stereo runs under carpets in car audio or home HiFi. Excellent long-run characteristics. Will split down the middle for normal stereo left/right cable runs. Supplied in a 50M length (which is actually 100M if split down the middle!) 0.12 X 132 STRANDS (x4) 16AWG/12AWG

Length	Code
50M	OFC132

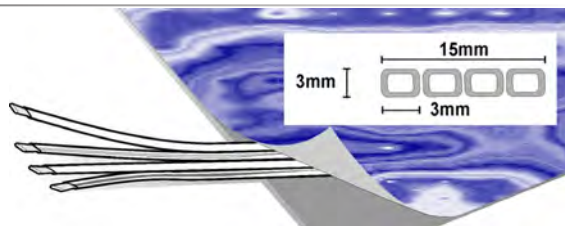

12AWG SOUNDLINK-QUAD OFC SPEAKER CABLE FOUR PLY ULTRA FLAT

Exotic high grade 99.99% OFC copper in a unique quad low-profile form. Unique ultra-thin, woven copper in a low profile for reduced capacitance. Ideal for running along floors under carpets in car audio or home HiFi. Will split down the middle for normal left&right stereo or Bi-wiring, etc. Supplied in a 50M length (which is actually 100M if split down the middle!) Recommended by leading audiophile stockist as an incredibly good cable with remarkable sonics for exceptional value for money audiophile use. 0.07 X 384 STRANDS (x4) 12AWG/10AWG

Length	Code
50M	OFC384



Recommended By:



50M


21mm

2.5mm



4mm

FLAT DESIGN



WOVEN OFC



*SUGGESTED AWG CABLE RATING GUIDE

POWER	5M	10M	20M
10-50W	18AWG	17AWG	16AWG
50-100W	15AWG	14AWG	13AWG
100-500W	13AWG	12AWG	11AWG
500-1KW	10AWG	9AWG	8AWG

*A GENERALIZATION FORMULA FOR USE AS A GUIDE ONLY. 8 ohm
Longer lengths are OK. Volume Loss may exceed 3dB
and frequency response may also be affected. 4 ohm



13 CABLE & ACCESSORIES

→ Data

NETWORKING CABLE CAT-5e & CAT6 - PREMIUM GRADE

CATEGORY 5e & 6 CABLE AUSTEL APPROVED FULL COPPER IN PULL BOX 100M & 305M

8x copper conductors in colour coded twisted pairs. Flame retardant polyethylene insulated, PVC sheathed. Suitable for a myriad of communication applications. Premium grade. Fully Austel Approved. Installers choice. See Section 16 COMPUTER for Connection Solutions. Crimp. Pre-made CAT5/6 leads, etc.



CAT-5e SOLID CORE

Category-5e 8x Single-Strand Full Copper Conductors

1GBps/100M Max. Twisted pairs (4x2) Full Copper w/ Colour coded insulation. Fully Austel Approved ISO/IEC 11801 and TIA/EIA 506 channel tested. Flame Retardant Polyethylene jacket. Nylon cord. Reverse metred Pull box.

SOLID CORE 100 Metre


Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
100M	Solid	Blue	CNC5100BU
100M	Solid	Yellow	CNC5100YL
100M	Solid	Red	CNC5100RD
100M	Solid	Pink	CNC5100PK

SOLID CORE 305 Metre

Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
305M	Solid	Blue	CCU5305BU
305M	Solid	Yellow	CCU5305YL
305M	Solid	Red	CCU5305RD
305M	Solid	Pink	CCU5305PK
305M	Solid	Green	CCU5305GN
305M	Solid	Grey	CCU5305GY
305M	Solid	Black	CCU5305BK

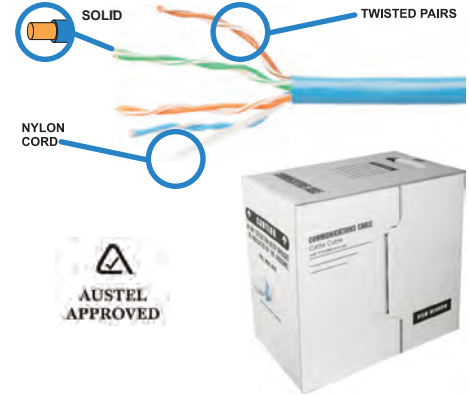

CAT-5e MULTI-STRAND

Category-5e 8x Multi-Strand Full Copper Conductors

1GBps/100M Max. Twisted pairs (4x2) Full Copper w/ Colour coded insulation. Fully Austel Approved ISO/IEC 11801 and TIA/EIA 506 channel tested. Flame Retardant Polyethylene jacket. Nylon cord. Reverse metred Pull box.

MULTI-STRAND 100 Metre


Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
100M	Multi	Blue	CNC5101BU
100M	Multi	Yellow	CNC5101YL
100M	Multi	Grey	CNC5101GY
100M	Multi	Red	CNC5101RD
100M	Multi	Green	CNC5101GN
100M	Multi	Pink	CNC5101PK

MULTI-STRAND 305 Metre

Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
305M	Multi	Blue	CNC5306BU
305M	Multi	Yellow	CNC5306YL
305M	Multi	Grey	CNC5306GY
305M	Multi	Red	CNC5306RD
305M	Multi	Green	CNC5306GN
305M	Multi	Pink	CNC5306PK

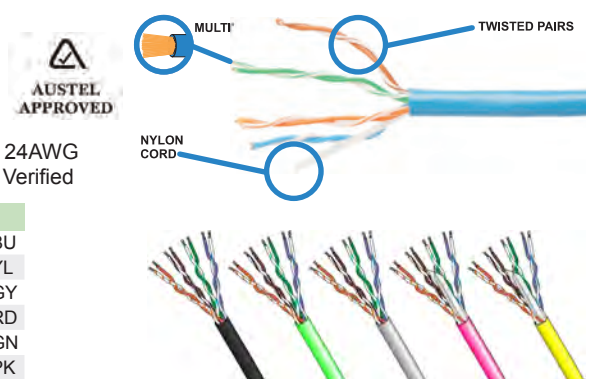

CAT-6 SOLID CORE

Category-6 8x Single-Strand Full Copper Conductors

10GBps/250M max. Twisted pairs (4x2) Full Copper w/ Colour coded insulation. Fully Austel Approved. Low cross-talk, low noise, premium grade cable. Class-E Flame Retardant Polyethylene jacket. Reverse metred Pull box.

SOLID CORE 100 Metre


Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
100M	Solid	Blue	CNC6100BU
100M	Solid	Yellow	CNC6100YL
100M	Solid	Grey	CNC6100GY
100M	Solid	Red	CNC6100RD
100M	Solid	Green	CNC6100GN
100M	Solid	Pink	CNC6100PK

SOLID CORE 305 Metre

Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
305M	Solid	Blue	CCU6305BU
305M	Solid	Yellow	CCU6305YL
305M	Solid	Grey	CCU6305GY
305M	Solid	Red	CCU6305RD
305M	Solid	Green	CCU6305GN
305M	Solid	Pink	CCU6305PK
305M	Solid	Black	CCU6305BK

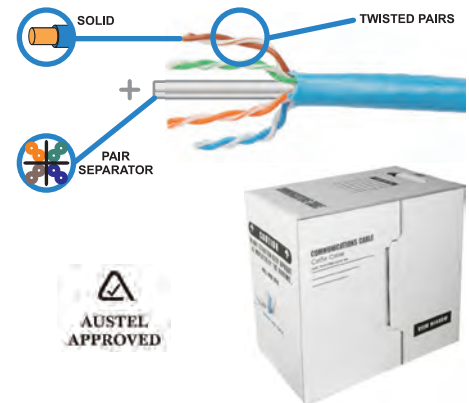

CAT-6 MULTI-STRAND

Category-6 8x Multi-Strand Wires

10GBps/250M max. Twisted pairs (4x2) Full Copper w/ Colour coded insulation. Fully Austel Approved. Low cross-talk, low noise, premium grade cable. Class-E Flame Retardant Polyethylene jacket. Reverse metred Pull box.

MULTI-STRAND 100 Metre


Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
100M	Multi	Blue	CNC6101BU
100M	Multi	Yellow	CNC6101YL
100M	Multi	Grey	CNC6101GY
100M	Multi	Red	CNC6101RD
100M	Multi	Green	CNC6101GN
100M	Multi	Pink	CNC6101PK

MULTI-STRAND 305 Metre

Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
305M	Multi	Blue	CNC6306BU
305M	Multi	Yellow	CNC6306YL
305M	Multi	Grey	CNC6306GY
305M	Multi	Red	CNC6306RD
305M	Multi	Green	CNC6306GN
305M	Multi	Pink	CNC6306PK

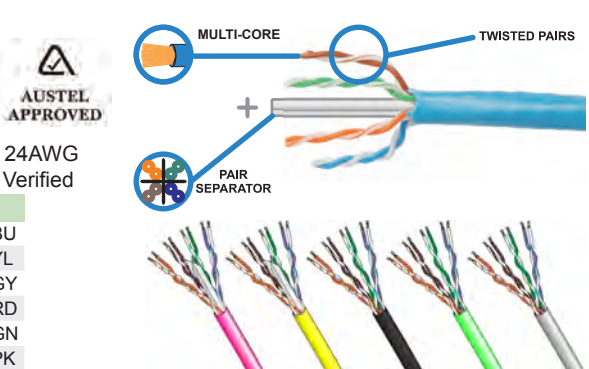



CAT5e / CAT6 SOLID CORE IN AN EASY-PULL BOX

PREMIUM CABLE - TANGLE FREE DISPENSER

Reel on a base for easy pull of cable to reduce twist and tangles. Supplied in a 1000 foot box. Full copper conductors. 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified. Reverse-Metre-Marked.



REEL STYLE MAY VARY

Length	Type	Code
305M	Cat5e	CNC5305
305M	Cat6	CNC6305

CAT5e / CAT6 ECONOMY SOLID CORE

Twisted pair data cable. Meets TIA-EID 568B channel test. CCA Spec. Reverse Metre Marked. Supplied in a Pull-Box.



Length	Colour	Code
100M	Blue	DDC5100BU
305M	Blue	DDC5305BU
305M	Grey	DDC5305GY
305M	Black	DDC5305BK

CAT6

Length	Colour	Code
305M	Blue	DDC6305BU

CAT5e ECONOMY MULTI-STRAND

Twisted pair data cable. Meets TIA-EID 568B channel test. CCA Spec. Reverse Metre Marked. Supplied in a Pull-Box.




Length	Colour	Code
100M	Blue	DDC5101BU
305M	Blue	DDC5306BU

COMPUTER CABLE MULTI-CONDUCTOR

Description	Reel	Code
9 Conductor + Earth/Screen	30M	CC9
9 Conductor + Earth/Screen	100M	CC90
12 Conductor + Earth/Screen	30M	CC12
12 Conductor + Earth/Screen	100M	CC120
25 Conductor + Earth/Screen	30M	CC25
25 Conductor + Earth/Screen	100M	CC250



CAT5e CABLE SHIELDED

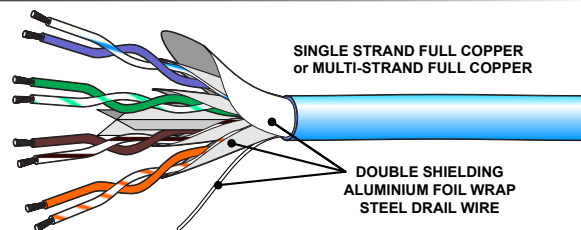

MULTI-STRAND SFTP

Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified


Length	Core	Colour	Code
100M	Multi	Blue	CNC5103
305M	Multi	Blue	CNC5308

SOLID-STRAND SFTP

Length	Core	Colour	Code
100M	Solid	Blue	CNC5102
305M	Solid	Blue	CNC5307



CAT6 CABLE SHIELDED

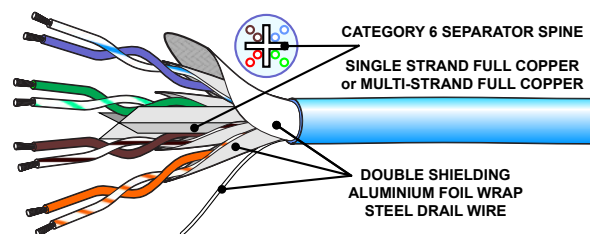

MULTI-STRAND SFTP

Pull-Box Reverse-Metre-Marked 24AWG ISO/IEC 11801 and TIA/EIA 568 Verified

Length	Core	Colour	Code
100M	Multi	Blue	CNC6103
305M	Multi	Blue	CNC6308

SOLID-STRAND SFTP

Length	Core	Colour	Code
100M	Solid	Blue	CNC6102
305M	Solid	Blue	CNC6307



TWISTED PAIR DROP CABLE

High grade, high current, low loss, low capacitance. Suitable for many applications including-Speaker wire, both 8 ohms and 100v line, Video intercoms, Low voltage applications (AC or DC) eg, security, garden lights etc. Twisted pair in black PVC Jacket, ideal for running through walls and areas which are damp and prone to water penetration or applications where a better quality cable is required. 8mm Outer sheath 1mm thick. 3mm with 48 strands x 0.2mm x 2 core, 300Vac max.

Length	Code
100M	CAB4822



AGGREGATE CABLE - COMPUTER MONITOR VGA (RGB-HV)

Typical computer VGA cable. Heavy-duty. All double shielded. 3x Shielded wires RGB (75W Coax) 4x Control wires (Common shield) Black 8mm heavy-duty jacket.

Length	Code
50M	SQS407
100M	SQS1407





13 CABLE & ACCESSORIES

→ Power

MAINS 240VAC 10A 3-CORE CABLE

Typical Mains Cord, Extra Flexible type. 3 Core Multi-strand Flex. 10A cable. Double Insulated. Supplied on 100M Reels. Save money with ProLink.

Colour	Length	Code
Grey	100M	PWC3-10G
Black	100M	PWC3-10B

MAINS 240VAC 7A 2-CORE CABLE

Mains Twin Lamp Cord. Flat, in white or black. 2 Core Multi-strand Flex. 7A cable. Double Insulated. Supplied on 100M Reels. Save money with ProLink.

Colour	Length	Code
Black	100M	PWC2-10B
White	100M	PWC2-10W




→ Communication

CURLY CORDS

Primarily for CB microphones, etc. Will suit other applications. 3 or 5 core plus braid shielding. Heavy duty build.

Description	Length	Code
3 Core	1.8M (6ft EXT)	ML3-6
3 Core	2.75M (9ft EXT)	ML3-9
3 Core	3.65M (12ft EXT)	ML3-12
5 Core	1.8M (6ft EXT)	ML5-6
5 Core	2.75M (9ft EXT)	ML5-9
5 Core	3.65M (12ft EXT)	ML5-12



→ Security, Communication, Data

SECURITY & CONTROL CABLE SHIELDED

Twisted Pair 7x0.2mm wrapped in Aluminium Mylar Shielding with drain wire.

Description	Length	Colour	Code
2 Core + Shield	100M	Grey	SHW3035
2 Core + Shield	300M	Grey	SHW3036
4 Core + Shield	100M	Grey	SHW3032
4 Core + Shield	300M	Grey	SHW3033




Blue CAT5/6e Shielded now available. Please Enquire...

SECURITY & CONTROL CABLE 4 CORE

Colour	Length	Code
White	100M	SEC414WH-100
White	305M	SEC414WH-305
Brown	100M	SEC414BR-100
Brown	305M	SEC414BR-305
Grey	100M	SEC414GY-100
Grey	305M	SEC414GY-305
Grey	100M	SHW3032
Grey	300M	SHW3033


PVC outer, Diameter 6mm. Twisted Pair. 14 multi-strand core by 6 with colour ID.

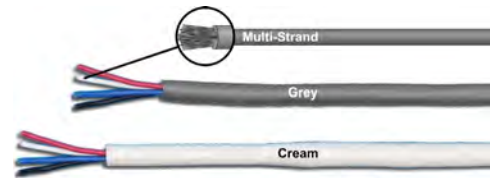

SECURITY & CONTROL CABLE 6 CORE

Colour	Length	Code
Cream	100M	SEC614WH-100
Cream	305M	SEC614WH-305
Grey	100M	SEC614GY-100
Grey	305M	SEC614GY-305
Brown	100M	SEC614BR-100
Brown	305M	SEC614BR-305

PVC outer, Diameter 5mm. Twisted Pair. 14 multi-strand core by 4 with colour ID.

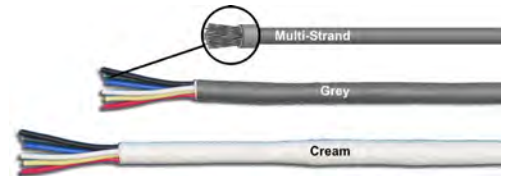


TELEPHONE CABLE - ROUND JACKET WITH TWO TWISTED PAIRS

GENUINE AUSTEL APPROVED 4C TELECOMMUNICATIONS CABLE

Cream Jacket. Solid core conductors. RED, BLACK, BLUE & WHITE. As used in telephone installations. Supplied on reels in two lengths.

Length	Code
100M	TC4-100
300M	TC4-300

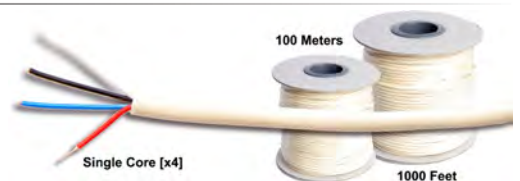

MODULAR FLAT MULTI-CONDUCTOR COMMUNICATION CABLE

Designed for use with modular connectors for extension leads etc. Can be used for many applications, burglar alarms etc. Cream in colour, supplied in a 100M pull box.

Length	Strands	Code
100M	4	FMC4
100M	6	FMC6
100M	8	FMC8





CABLE TIES

ORDER ONE BAG TO RECEIVE 100 PIECES

Colour	Size	Code
White	100mm x 2.5mm	NCT120
Black	100mm x 2.5mm	NCT121
White	142mm x 3.6mm	NCT130
Black	142mm x 3.6mm	NCT131
White*	156mm x 3.6mm	NCT140
Black *	156mm x 3.6mm	NCT141
White	203mm x 3.6mm	NCT150
Black	203mm x 3.6mm	NCT151
White	292mm x 4.8mm	NCT160
Black	292mm x 4.8mm	NCT161


* Cable ties with Anchor Point (See below)



CABLE TIES WITH ANCHOR

Terminates to a ring for securing with a screw, etc. Order ONE to receive a bag of 100 pieces.

Colour	Size	Code
White*	156mm x 3.6mm	NCT140
Black *	156mm x 3.6mm	NCT141

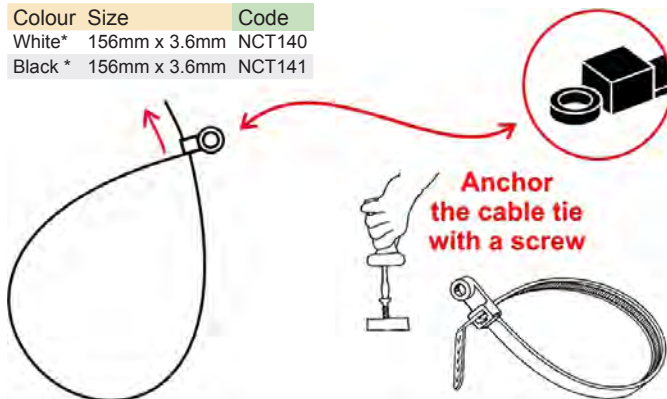

CABLE TIES IN A KIT

100 PIECES ASSORTED

Excellent hobby or tradesman solution with a selection of popular sizes of cable ties and stick-on holders too. Nylon. Assorted colours. Supplied in a plastic jar.

50x	2.5 x 100mm
25x	2.5 x 200mm
25x	Stick-N-Hol

Code
NCT500



CABLE TIE GUN

Tightens cable ties with a trigger. Automatic tension, pull and cut in one action, then twist to cut off excess.

Code
HT381




CABLE CLIPS FIGURE-8

DUAL [X2] CABLE

Order One to receive 20 Suits Figure eight cable White. Nail inclusive.

Size	QTY	Code
5mm	x20	DQ5
13mm	x20	DQ13
15mm	x20	DQ15



CABLE CLIPS COAX & POWER CORD

ROUND CABLE

Order One to receive 100 (or 20*)

Size	QTY	Colour	Code
6mm	x100	White	CC600W
6mm	x100	Black	CC600BK
7mm	x100	White	CC700W
7mm	x100	Black	CC700BK
10mm	x20*	White	DQ10



CABLE CLIPS STICK-ON

Adhesive backed clips Accepts up to 7mm diam Receive a bag of 10.


Size	Code
7mm	CTC12



CABLE CLIPS STICK-ON

Adhesive backed clips Accepts up to 7mm diam Receive a bag of 10.

Size	Code
7mm	CTC10



TWIST-LOCK CABLE HOLDER

STAND-OFF

4mm Hole mount 11mm Cable 20mm stand-off

Code
WTL11

LARGE

17mm Cable

Code
WTL17



SQUARE CABLE HOLDER

LOCKS

4mm Hole mount 16x11mm Cable holder

Code
WH1

LARGE 25x11mm


Code
WH2



CABLE TIE MOUNTS

Suit standard Cable ties Panel mount anchoring 28mm² Adhesive Backed Packaged in bags of 10, Black or White.

Colour	Code
White	CTM100
Black	CTM101





13 CABLE & ACCESSORIES

13 CABLE & ACCESSORIES

→ Accessories

VELCRO® VELSTRAP

VELCRO WITH A 1" BUCKLE

25mm wide Velcro Strip with a ring for a secure hold of bulky items. Plastic buckle allows easy rip and extra wrap hold strength. Suitable for many holding and securing type applications. Several lengths available...




VELCRO® VELSTRAP

VELCRO WITH A 1" BUCKLE

25mm wide Velcro Strip with a ring for a secure hold of bulky items.


Length	Code
300mm	FT22002
450mm	FT22102
600mm	FT22202
900mm	FT22302



VELCRO® ONE-WRAP 2M

One-Wrap is double sided Velcro Hook one side, Loop the other Unlike cable ties this is resealable Supplied in 2 Metre rolls

Colour	Length	Code
Black	2M	FT25572
White	2M	FT25573



VELCRO® ONE-WRAP 5M

One-Wrap is double sided Velcro Hook one side, Loop the other Secures items and cables, etc. Supplied in 5 Metre rolls

Colour	Length	Code
Black	5M	FT25578
White	5M	FT25579




VELCRO® TIES

13x200mm Double sided Velcro Hook one side, Loop the other with feed-thru 1/2" buckle hold Ideal re-usable cable organiser. Supplied no packaging (bulk)

Colour	Code
Black	FT20017

Bulk Roll quantity is 100 pcs (POA)

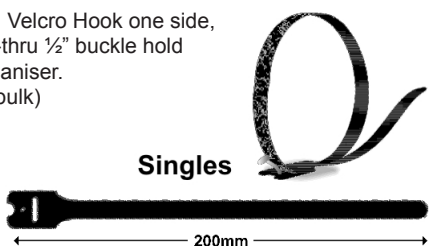

VELCRO® TIES

25x200mm Double sided Velcro Hook one side, Loop the other with feed-thru 1" buckle hold Excellent cable organiser. Supplied in blister pack hanger. Order one to receive a box of 5.

Colour	Code
Black	FT25564



VELCRO® TIES COLOUR

25x200mm Double sided Velcro Hook one side, Loop the other with feed-thru 1" buckle hold Supplied in blister pack hanger Order one to receive a box of 5 Red Blue Green Yellow Black


Code
FT25565



VELCRO® STICKY-BACK

Sticky-Back is a weather resistant adhesive backed Hook-Loop fastener. 2x1M rolls= 1M Total.


Colour	Length	Code
Black	1M	FT25570
White	1M	FT25571



VELCRO® HANDY-DOTS

Weather resistant adhesive backed Hook-Loop fasteners pre-cut 22mm (~1") circles Light duty hold points ~100g 40x Pairs supplied packaged

Colour	Code
Black	FT25568
White	FT25569

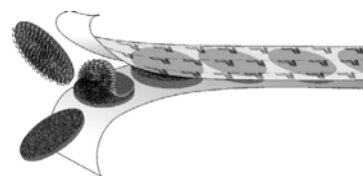

VELCRO® HOLD-DOWN

Hold-Down Pre-cut strips of Velcro with an adhesive bond backing for fastening over a 1Kg each! 50x25mm x 6 pcs ea.

Colour	Code
Black	FT25558



VELCRO® HOLD-DOWN

ROUGH SURFACE TYPE Pre-cut strips of Velcro with an adhesive bond backing for fastening to most porous surfaces 100x25mm x 6 pcs ea.


Colour	Code
Grey	FT25546



HOOK & LOOP SELF-GRIPPING FASTENER

Adhesive backs. 26 x 150mm. 10 pcs per bag

Code
AFT10

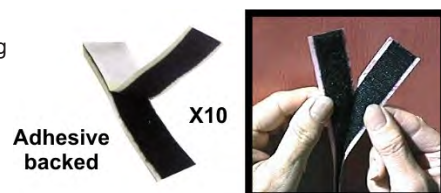

DOUBLE-SIDED TAPE

FOAM & CLOTH

Adhesive on both sides Various types available Foam sponge thick types Extra thin tissue types Heavy-duty Gaffa types



See Section 14 TOOLS & TEST EQUIPMENT

SURFACE PREPARATION WIPE

IMPREGNATED ISOPROPYL ALCOHOL

Wet surface preparation wipe. Remove Oil, Grease and Dust etc. Contains folded wipe impregnated with 70% isopropyl alcohol. Recommended for use with VELCRO brand adhesive products etc. Wipe Size : 125x145mm.

Code
FT60001






SPIRAL WIRE WRAP LIGHT

Winds around to secure messy wiring from behind computers, stereos, etc. Approx. 10 Metres at 5mmØ. Stretches to about 25mm

Colour	Code
Black	SPWR10BK
White	SPWR10WH



SPIRAL WIRE WRAP

Winds around messy cabling and protects. Aerpro. BLACK Length is approx. 10M

Diam.	Code
4-50mm	SLT4
7.5-60mm	SLT75
15-100mm	SLT15



SPIRAL WIRE WRAP HEAVY DUTY

Winds around to secure messy wiring from behind computers, stereos, etc. Approx. 10 Metres at 20mmØ. Stretches to around 120mm+

Colour	Code
Black	SPRL15B
White	SPRL15W



EASY-WRAP CABLE TIDY

NEAT & TIDY ORGANIZER

CABAC Easy Wrap Solution Puts all your messy cords neatly in one place! **Includes a handy applicator making assembly quick n' easy!** A unique solution to a messy problem Easy to remove and re-use too....

20mm x 1.5M

Code
EW20BK

16mm x 1.5M

Code
EW16BK



SPLIT WIRE WRAP REINFORCED

AUTOMOTIVE LOOM TYPE

Split down the middle for inserting multiple wiring. Protective ribbed casing, like a vacuum hose, so will bend for easy installation. Diameter does not stretch. Flexible UV Black ABS Plastic. 10 Metre lengths, several sizes.

7mm x 10M


Code
SLT7

10mm x 10M

Code
SLT10

16mm x 10M

Code
SLT16

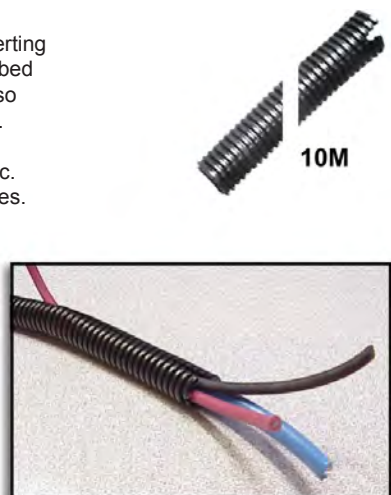

STRAIN RELIEF BUSHING

CABLE CLAMPS

Chassis mount
6.2Ø→7.4Ø 10pcs

Code
SRC510

7.4Ø→8.2Ø 10pcs


Code
SRC610



RUBBER GROMMETS

CHASSIS MOUNT 10pcs

Please Order ONE to Receive a bag of 10.

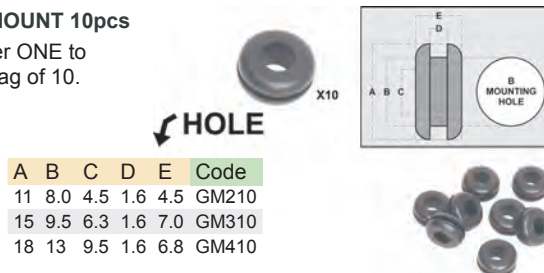

A	B	C	D	E	Code
11	8.0	4.5	1.6	4.5	GM210
15	9.5	6.3	1.6	7.0	GM310
18	13	9.5	1.6	6.8	GM410

→ Tools

UNIVERSAL CABLE STRIPPER

Patented device for stripping the covers off today's modern cable styles, eg. STP/UPT 4P/6P/8P Speaker, Coax, etc.

Code
HTS501A



COAXIAL CABLE STRIPPER

Strip coax cable with ease Suits most crimp plugs Adjustable blade depth

Suit	RG6 (5C2V), RG58 (3C2V), RG59 (4C2V)
Code	HT377



COAXIAL CABLE STRIPPER

Suits most crimp plugs Adjustable blade depth

Suit	RG6 (5C2V), RG58 (3C2V), RG59 (4C2V), RG174
Code	HT332



COAXIAL CABLE STRIPPER

ADJUSTABLE COAXIAL CABLE STRIPPER

Multi-blade combination to get best result. Adjustable blades for different cable thickness. Stripping length adjustment option. Suitable for RG-58, RG-59 and RG-6 Cables.

Code
HT-322



→ Radio, Communication

DIAL CORD

100 Metre reel of 0.5mm white woven nylon cord. Suit dial cord repair of old radios, etc.

Size	Code
100M	K665





13 CABLE & ACCESSORIES

→ Heat Shrink


HEAT SHRINK TUBING MIL. SPEC.

1.2 Metre Lengths. MIL-1-23053

Premium grade. Flame retardant. Long Life. Optimum performance. XLP series is cross-linked tubing that conforms to MIL-1-23053/3 class 3. It will withstand -45°C → 125°C for normal operating conditions & 200°C for short intervals. Black tubing also resists ultraviolet radiation. It can be easily shrunk with a 100°C+ heat gun, etc. See Section 14 TOOLS & TEST EQUIPMENT. All tubing is flame retardant except clear, which is flammable & conforms to MIL-1-23053/5 class 2. Highly flexible. 2:1 shrink ratio. Ideal for insulation, colour coding & mechanical protection, etc. 600V rated. Only 5% longitudinal shrinkage. Premium quality series.




BEFORE DiamØ=Code(mm) - **AFTER** DiamØ=50%



Size	Black	Clear	Red	Blue	White
1.5mm	XLP1.5BK	XLP1.5CL	XLP1.5RD	XLP1.5BU	XLP1.5WH
2.5mm	XLP2.5BK	XLP2.5CL	XLP2.5RD	XLP2.5BU	XLP2.5WH
3.5mm	XLP3BK	XLP3CL	XLP3RD	XLP3BU	XLP3WH
5.0mm	XLP5BK	XLP5CL	XLP5RD	XLP5BU	XLP5WH
7.0mm	XLP7BK	XLP7CL	XLP7RD	XLP7BU	XLP7WH
10mm	XLP10BK	XLP10CL	XLP10RD	XLP10BU	XLP10WH
13mm	XLP13BK	XLP13CL	XLP13RD	XLP13BU	XLP13WH
20mm	XLP20BK	XLP20CL	XLP20RD	XLP20BU	XLP20WH
25mm	XLP25BK	XLP25CL	XLP25RD	XLP25BU	XLP25WH

Also available in Yellow/Green Striped Earth Identification colours
See the XLP-YG Range on the opposite page...

PREMIUM GRADE
MIL. SPEC.
HEAT SHRINK

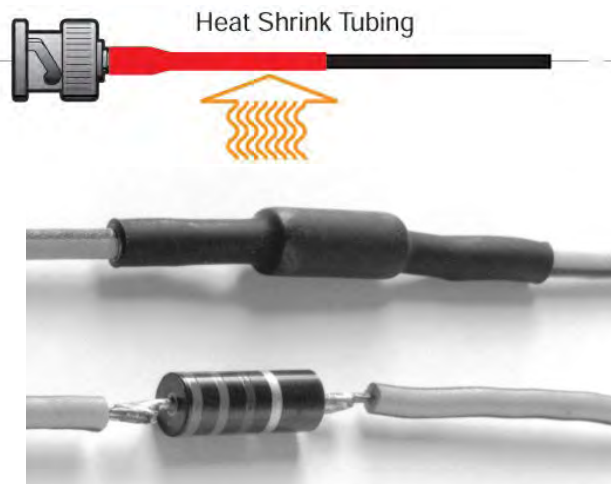

HEAT SHRINK TUBING

Flexible heat shrinkable tubing Flame retardant, good resistance to most fluids and solvents, etc. High dielectric and tensile strength. Excellent for electrical identification, insulation, strain relief, cable bonding. 600V 50% shrink ratio at 90 g 120°C.

BEFORE DiamØ=Code(mm) - **AFTER** DiamØ=50%



Size	Black	Yellow	Red	White	Green	Blue
1.0mm	CB102-1.0BK	CB102-1.0YL	CB102-1.0RD	CB102-1.0WH	CB102-1.0GN	CB102-1.0BU
2.0mm	CB102-2.0BK	CB102-2.0YL	CB102-2.0RD	CB102-2.0WH	CB102-2.0GN	CB102-2.0BU
2.5mm	CB102-2.5BK	CB102-2.5YL	CB102-2.5RD	CB102-2.5WH	CB102-2.5GN	CB102-2.5BU
3.0mm	CB102-3.0BK	CB102-3.0YL	CB102-3.0RD	CB102-3.0WH	CB102-3.0GN	CB102-3.0BU
4.5mm	CB102-4.5BK	CB102-4.5YL	CB102-4.5RD	CB102-4.5WH	CB102-4.5GN	CB102-4.5BU
5.0mm	CB102-5.0BK	CB102-5.0YL	CB102-5.0RD	CB102-5.0WH	CB102-5.0GN	CB102-5.0BU
6.5mm	CB102-6.5BK	CB102-6.5YL	CB102-6.5RD	CB102-6.5WH	CB102-6.5GN	CB102-6.5BU
7.0mm	CB102-7.0BK	CB102-7.0YL	CB102-7.0RD	CB102-7.0WH	CB102-7.0GN	CB102-7.0BU
10mm	CB102-10.0BK	CB102-10.0YL	CB102-10.0RD	CB102-10.0WH	CB102-10.0GN	CB102-10.0BU
13mm	CB102-13.0BK	CB102-13.0YL	CB102-13.0RD	CB102-13.0WH	CB102-13.0GN	CB102-13.0BU
20mm	CB102-20.0BK	CB102-20.0YL	CB102-20.0RD	CB102-20.0WH	CB102-20.0GN	CB102-20.0BU
25mm	CB102-25.0BK	CB102-25.0YL	CB102-25.0RD	CB102-25.0WH	CB102-25.0GN	CB102-25.0BU



HEAT SHRINK TUBING - WITH ADHESIVE

A co-extrusion of irradiated crosslinking polyolefin with specially designed internal hot-melt adhesive. Excellent for back-end connector sealing, breakouts and connector to cable transition supports, etc. High expansion ratio makes it possible to repair most damaged cable jackets without removing connectors.

600V Insulation rated
50% shrink ratio at 90 g 120°C.

BEFORE DiamØ=Code(mm)
AFTER DiamØ=50%

DWT SERIES: 1.2M

Size	Code
1.5mm	DWT-1.5BK
2.0mm	DWT-2.0BK
2.5mm	DWT-2.5BK
3.0mm	DWT-3.0BK
4.5mm	DWT-4.5BK
5.0mm	DWT-5.0BK
6.5mm	DWT-6.5BK
7.0mm	DWT-7.0BK
10mm	DWT-10.0BK
13mm	DWT-13.0BK
20mm	DWT-20.0BK
25mm	DWT-25.0BK


ALL 1.2 Metre in BLACK

EARTH IDENTIFICATION HEAT SHRINK

BRIGHT GREEN/YELLOW STRIPED

Dual colour stripe tubing for Easy identification of common Earth wire cables to ground. -75°C to 135°C (200°C short term) Flame retardant XLP Mil. Spec. Listed as pre-shrunk diameter Shrinks to approx. half diameter.

Size	Code
3mm	XLP3YG
5mm	XLP5YG
7mm	XLP7YG
10mm	XLP10YG
13mm	XLP13YG
20mm	XLP20YG
25mm	XLP25YG



HEAT SHRINK KIT

SEVEN PIECE BAG

A selection of popular sizes 1.2 Metre lengths x7 XLP Series mil. spec.

XLP1.5BK,
XLP2.5BK,
XLP3BK,
XLP5BK,
XLP7BK,
XLP10BK,
XLP13BK



Code
HSK1BK

HEAT-SHRINK TAPE

SHRINKS TO SEAL

Thin Irradiated Polyolefin tape. Shrinks and amalgamates forming a rigid seal on even complex items. Make Y shapes, etc. Simply wrap & heat Black. 20mm x 50 Metres

Code
HST20



→ Heat Shrink, Accessories

MINI-BLOW TORCH

KEY-RING SIZED

"Magna Lite Blow Torch" Butane refillable Applications include Heatshrink tubing Fusing rope ends Unfreezing locks Piezo ignition Acute focusing Flame adjustable Weller branded



Code
WML100

PYRO-PEN POCKET BLOW TORCH

BUTANE SOLDERING IRON

Portable pocket size Includes soldering tip for excellent portable high temperature soldering. Self-igniting piezo start. Uses lighter fluid Butane gas (required). Hot-Blow attachment included for Heatshrink.



Code
WSTA6

See Section 14 TOOLS & TEST EQUIPMENT for more...

→ Accessories, Security, Data

SECURITY CABLE & LOCK

2M STEEL LOOP

Description Code
Combo Lock NBL50

2M STEEL LOOP

Description Code
Pad Lock NBL51

LAPTOP HOOK

Description Code
Combo Lock NBL18

LOOP & LOCK

Description Code
Combo Lock NBL21





13 CABLE & ACCESSORIES

13 CABLE & ACCESSORIES

→ Accessories

THE HERBIE CLIP™

When it comes to hose clamps, nothing beats the reliability and speed of fitting the Herbie Clip. Available in a comprehensive range of sizes, the Herbie Clip is a one piece nylon hose clamp that uses a proven double row of interlocking teeth to produce an extremely secure and reliable fit. Near perfect circle fitting for a better, tighter seal as a hose clamp. Quality molded from Nylon 6.6 carbon based polymer for extra long life. The Herbie Clip is totally resistant to any atmospheric conditions. Impervious to a majority of chemicals and fuels, salt water, etc. Excellent solution for long term reliability in hostile environments. The result is an extremely strong clamp guaranteed to 200psi. A popular solution in many industries worldwide for twenty years now.

Very Strong and Reliable
Very Fast Application
Nylon Hose Fastener
18 Years Strong



The Double Grip Hose Clip
Available in 5mm to 105mm




SUPERIOR SOLUTION TO METAL CLAMPS

Unlike any other hose fastener available, the Herbie Clip with its patented dual interlocking tooth design allows the fastest and easiest application with incredible reliability, durability and functionality. The clip is Heat, Cold and UV stabilised. It will not rust or corrode. It won't react with contaminants nor damage or react with the application. An impressive solution for many situations offering many advantages. The clip is an economical solution as it is cheaper than metal strips and the ease and speed of application saves considerable time and money. Specific hand tools for reliable and consistent operation are available, however, they can also be fastened by a pair of Multi-Grips. Easy removal for unlimited re-use of the Herbie Clip and easy re-work.

WHY USE THE HERBIE CLIP™?

Patented double jaw design for 200psi strength.
Heat & UV stabilised. Impervious to contaminants.
Quicker & easier to fit or adjust than metal clips.
Improved safety as no sharp edges to cut operator.
Minimal leak path as clamps to a near perfect circle.
Fitting & Removal tools available for production use.
Carbon based polymer will never rust or corrode.
Non conductive so more suitable for cable fixing,
no electrolytic reactions with other metals, etc.
20 years of field use in many fields & applications.
Simplistic, cost effective. Now available from WES.

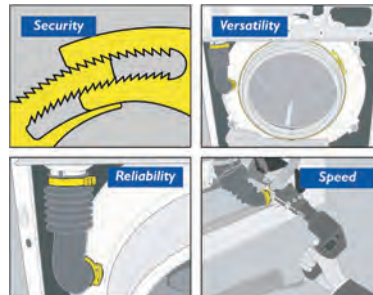

THE SMART SOLUTION FOR MANY APPLICATIONS:



HERBIE CLIP™ TOOLS

You can use any Multi-Grip type hand tool.
For a consistent setting, use the tools below.

MANUAL FITTING TOOL

Clamps to the same number of teeth.

Code
HCT3000



CLIP REMOVAL TOOL

Twist to remove the Herbie Clip.

Code
HCT4000



HERBIE CLIP™ CODES LISTING

A min	B max	C width	D	E	F	G	Code
5.60	6.50	4.2	1.4	8.3	17.5	0.53	HC0642
6.50	7.90	4.5	1.6	9.9	20.9	0.82	HC0745
7.90	9.20	4.4	1.6	9.3	20.7	0.90	HC0844
9.20	10.3	4.5	1.7	10.9	22.2	1.11	HC1045
10.2	11.8	5.8	1.7	12.2	27.9	1.73	HC1158
11.1	12.9	6.1	1.7	12.3	28.7	1.94	HC1261
12.0	13.8	6.1	1.7	12.9	28.9	1.95	HC1361
13.5	15.1	7.1	2.0	13.6	32.7	3.26	HC1471
15.0	17.1	7.1	2.0	12.9	34.8	3.18	HC1671
16.9	19.1	6.9	2.1	12.5	32.4	2.00	HC1869
18.1	20.6	7.1	2.1	12.7	35.7	3.23	HC1971
20.3	23.0	6.4	2.1	14.2	39.0	1.08	HC2264
22.2	24.9	7.0	2.0	13.0	37.0	3.61	HC2470
24.5	27.6	7.1	2.1	12.5	37.3	3.43	HC2671
26.5	29.5	7.4	2.2	13.4	40.0	4.80	HC2874
28.8	32.2	9.0	2.0	13.4	42.0	5.60	HC3090
32.0	34.8	9.1	1.9	13.8	40.0	6.15	HC3391
34.3	37.9	8.9	2.1	13.5	42.0	7.05	HC3689
37.0	40.4	8.9	2.1	13.3	42.2	6.48	HC3989
40.1	44.2	9.0	2.2	13.4	42.2	6.60	HC4290
43.2	46.2	8.9	2.1	12.8	42.5	6.81	HC4589
45.8	50.4	9.0	2.0	13.9	45.0	7.31	HC4790
48.5	53.8	9.0	2.1	14.4	48.0	8.17	HC5190
53.0	57.0	9.0	2.1	14.7	49.0	7.61	HC5590
54.9	60.1	9.3	2.3	16.0	53.4	9.95	HC5793
59.0	64.7	17.0	9.3	10.7	9.3	7.93	HC6393

Prices PER CLIP. For larger sizes & quantities, Please enquire.

